# JJ Blinds

Ph - 0470 662 221 | Email - info@jjblinds.com.au Website - www.jjblinds.com.au

### HOW TO MEASURE FOR YOUR INTERNAL BLINDS

### Measuring your window blinds

No matter what type of internal blind you require, measuring your windows is easy with our simple instructions.

#### Face Fit or Recess?

Face Fit

When the blinds are required to hang outside the window recess.

**Recess Fit** 

When the blinds are required to fit inside the window recess.

## What you will need

Always use a metal tape measure.

We require your measurements in millimetres.

Measure width x drop (do not reverse these).

Measure every window. There may be slight variation that may affect your window furnishings fitting perfectly.


Do not take your measurements from house plans as they will not be accurate.

If measuring with a partner, make sure they repeat the measurements out loud as they write them down.

Double check all details are correct before ordering.

For all types of blinds follow these instructions if you want your blind to hang outside the window recess:

- A. .Measure the width from the outer edge of the architrave to the opposite edge.
- B. .Measure the drop from the top of the architrave to where you want the blind to finish.

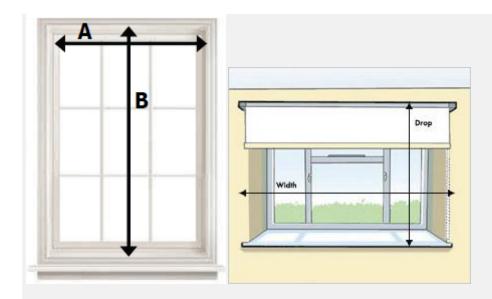

### How to measure for a Recess Fit


Select this option if you wish to supply the size of the recess into which the blinds will fit. To provide this measurement, select "inside recess" as the measurement option. This will require measurement of the window in 3 places, as shown to the left; please provide us with the smallest measurement.

For all types of blinds follow these instructions if you want your blind to hang outside the window recess:

#### How to measure for a Face Fit

- A. Measure the width from the inside of the window frame from left side to right side. Making sure to measure at the top of the reveal and not the bottom of the window, as this is where the brackets will be mounted.
- B. Measure the drop from the top of the inside recess to the base of the inside sill.





We will deduct a small amount to ensure the blinds clear the sides and bottom of the recess, allowing for correct operation.

All of our blinds are made to measure. Please follow the instructions carefully. Make sure you take your measurements using a STEEL rule or tape. Take all your measurements in millimeters (mm).

When measuring, always look out for things like window handles or tiles and take their position into account if necessary, to ensure a perfect fit.

When taking measurements please follow this helpful rule - "measure once, measure twice and measure again to be sure!".

All of our blinds can be fitted into the face of the window frame or wall, or into the top of the lintel. This gives you complete control over the positioning of your blind.

Our vertical blinds are operated with a wand, so bear in mind, when choosing your control side if you want them to bunch to the right then you choose left control and vice versa.

All the blinds will be custom made to size provide, do not some product the fabric material will be smaller than the finished size to accommodate the brackets and fitting

Do note: roller blinds fabric material will be approx 30mm less , this is accommodate the brackets mechanism for the blind

Important Note: All our blinds and awnings are made to your individual measurements, so please take extra care when measuring. We will not be held responsible for incorrect measurements, supplied by the customer